




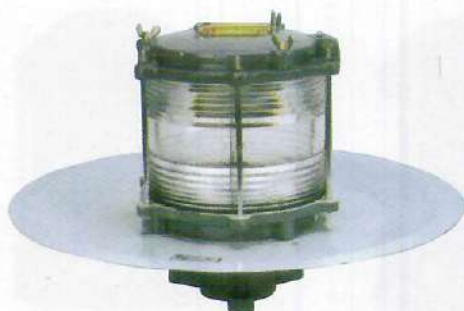

Morse Signal Light








CXD7

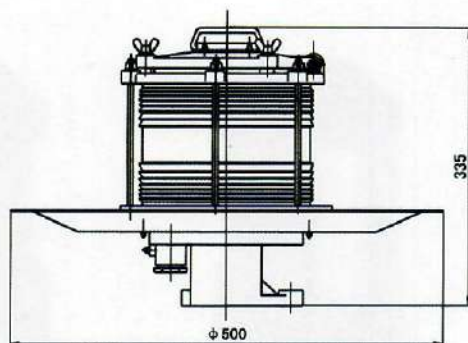

Daylight Signal Light



CXD8

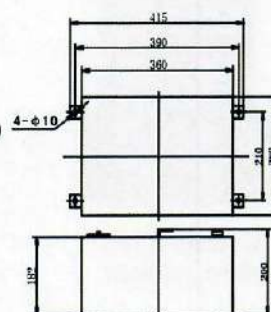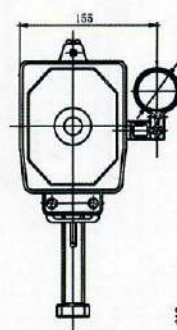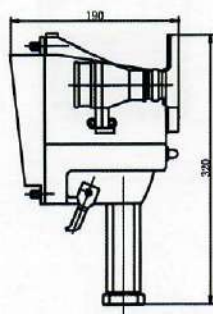

Specifications

Name	Type	Voltage	Power	Lamp holder	Weight	Protection class	Visibility	Level arc
Morse signal Light	CXD7	220V 110V	25W×3	B22d	6.4kg	IP55	> 5n.m	360°
Daylight signal light	CXD8	24V	60W	G6.35	2.6kg	IP44	> 2n.m	

Remark: CXD7 fits for mo's signal light communication of ships, its optical, electric and mechanical performances all conform to IEC and CCS standards, and its shell materials are cast aluminum and steel, CXD8 fits for daylight communication between the ships above 150t, conforms to JIS and CCS standards and is approved by CCS(China Classification Society). With cast aluminum shell and mechanical flash device, it can additionally be equipped with 24V charger and battery box (110V.60Hz;220V.50Hz)