

1076 Halogen 1076060000



1076 MAX.230/MAX.240/R7S/IP67/HALOGEN /HALOGENFREE/-O/M20-10.

Floodlight seamless housing of deep drawn stainless steel ASIS 316. The housing is powder coated white and enamelled up to 70-80 µm thickness. The floodlights provide extreme corrosion resistance and high light output.



Technical data

Maximum ambient temperature (°C)	4 5
IP classification	6 7
Minimum ambient temperature (°C)	- 4 0

Dimensions

Net weight (kg)	2,4
Length (mm)	244
Width (mm)	135
Height (mm)	250
Gross weight (kg)	2,56

Body

Colour of body	White
Body material	Stainless Steel AISI 316L
Body colour code	RAL 9016

Optic

Colour of reflector	Silver
Material of reflector	Aluminium
Material of diffuser	Glass tempered

Electrical data

Maximum voltage (V)	240
---------------------	-----

Light source

Number of lamps	1
Lamp base	R7s
Light source	QT-DE
Lamp power (W)	230

Termination

Number of cable glands	1
Type of cable gland	M20-Brass
Optic	Narrow beam
Cable length (m)	1,5
Minimum cable diameter	8
Maximum cable diameter	10.5
Ready for mounting	Bracket stainless steel

Remarks

Remarks	Cable entry 1xM20x1.5-M24x1.5 brass Halogenfree
---------	--

1076 Halogen 1076060000





1076 MAX.230/MAX.240/R7S/IP67/HALOGEN
/HALOGENFREE/-O/M20-10.

Floodlight seamless housing of deep drawn stainless steel ASIS 316.
The housing is powder coated white and enamelled up to 70-80 µm
thickness. The floodlights provide extreme corrosion resistance and high
light output.



Drawings

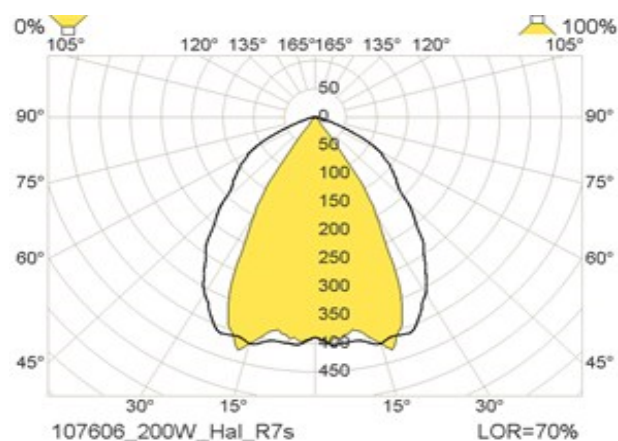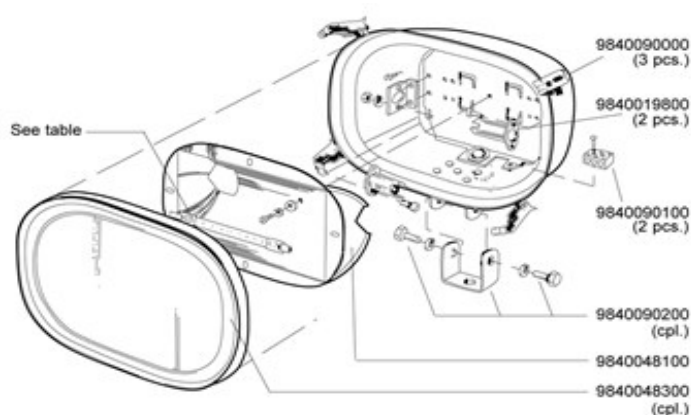

1076 Halogen 1076060000



1076 MAX.230/MAX.240/R7S/IP67/HALOGEN
/HALOGENFREE/-O/M20-10.

Floodlight seamless housing of deep drawn stainless steel ASIS 316.
The housing is powder coated white and enamelled up to 70-80 µm
thickness. The floodlights provide extreme corrosion resistance and high
light output.



Drawings

