






1



Navigation lights aqua signal 55

Application: Vessels > 20 - < 50 m in length. Lights marked with index ⚓ may also be used on inland waterways without limitation of length

Approvals: International according to IMO 1972, in Germany through BSH, other countries in particular see list of approvals

Min. visibilities: 2 n.m., masthead light 5 n.m.

Protection class: IP 56

Housing: Polycarbonate, glass fibre reinforced, other components of non-corrosive materials. Nonmagnetic, seawater resistant

Housing colour: Mat black

Optics: Easy to change, seawater resistant special plastic Fresnel lens

Electric: Conus inclusive 1.5 m special connection cable 2 x 1.5 mm², self-protective insulation, class II

Cable insert: PG 13.5 with buckling protection

Lamp: Easy to change tungsten bulb with socket BAY 15d

Mounting: Base flange attachment, 4 screws Ø 8 mm (not included), allround lights may also be hoisted when 2 halyard hooks are attached (not included). Additional mounting aids see drawing

Navigationslaternen aqua signal 55

Einsatzbereich: Wasserfahrzeuge > 20 - < 50 m

Länge: alle mit ⚓ gekennzeichneten Laternen dürfen auf europäischen Binnenschiffen bis zur „Grenze der Seefahrt“ gefahren werden. Die Fahrzeuglängenbegrenzung ist dann aufgehoben
Zulassung: International entsprechend IMO 1972. In Deutschland durch das BSH, andere Länder siehe Zulassungstabelle

Mindesttragweite: 2 sm, Topplaterne 5 sm

Schutzklasse: IP 56

Gehäuse: Glasfaserverstärktes Polycarbonat, Einbauteile aus nichtrostenden Materialien. Amagnetisch, seewasserfest

Gehäusefarbe: Mattschwarz

Optik: Auswechselbare, seewasserfeste Spezial-Kunststoff-Fresnellinse

Elektrik: Verkabelt mit 1,5 m Spezialkabel

2 x 1,5 mm², schutzisoliert nach Klasse II




Kabeleinführung: PG 13,5 mit Knickschutz

Leuchtmittel: Leicht auswechselbare Spezialglühlampe mit Sockel BAY 15d

Montage: Bodenbefestigung mit 4 Durchgangsschrauben M 8 (gehören nicht zum Lieferumfang). Signallaternen können auch vorgeheißt werden.





Anbauszubehör siehe Zeichnung



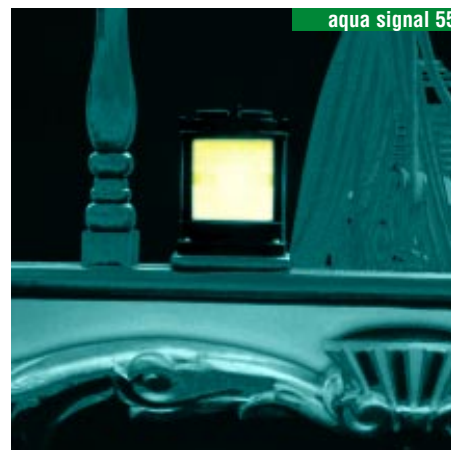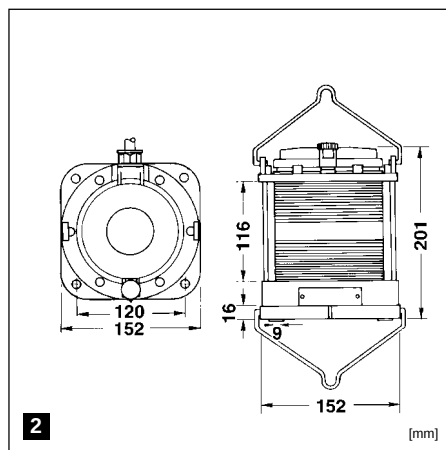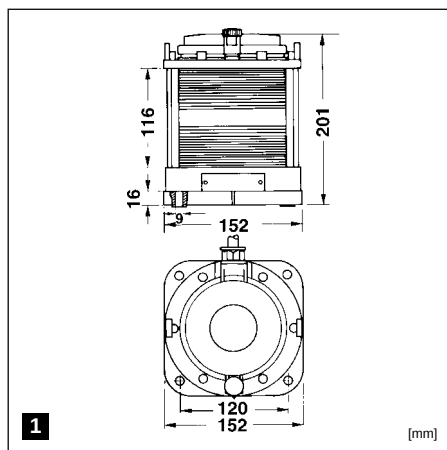

Part No. / Best.-Nr.			Starboard Steuerbord	Port Backbord	Masthead Topp	Stern Heck		Signalling Signal		
										
 IMO   (§ Info  25)	12 V, 25 W	3535102	3534202	3532002	3533702	3533402	3531702	3531202	3531102	
	24 V, 25 W	3535103	3534203	3532003	3533703	3533403	3531703	3531203	3531103	
	 BAY 15d	incl.								
 USCG  (§ Info  25)	12 V - 120 V	3535150	3534250	3532050	3533750	3533450	3531750	3531250	3531150	
	 BAY 15d	not / nicht incl.								
	min. visibility (n.m.) / Mindesttragweite (sm)		2			5	2			
 kg					1.30	1.20				

Spare Parts / *Extras not included
Ersatzteile / *Zubehör gehört nicht zum Lieferumfang

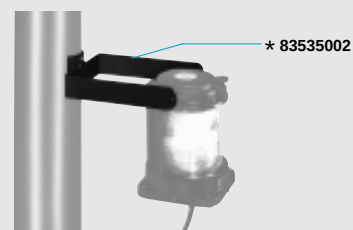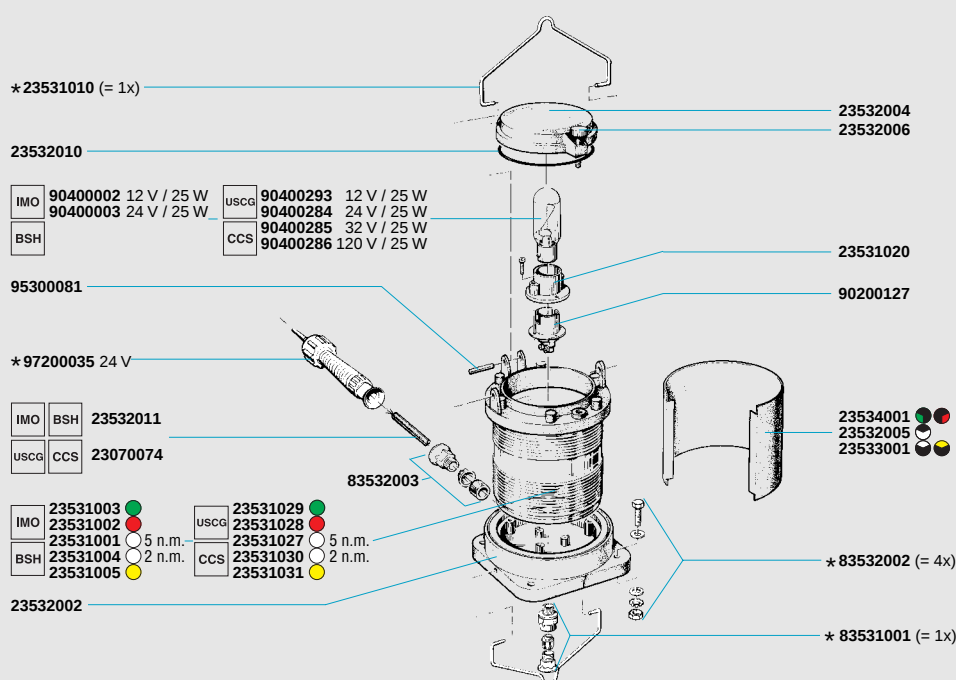

● Starboard / Steuerbord ● Port / Backbord ● Masthead / Topp ● Stern / Heck ● Signalling / Signal